

Research Article

CARNIVORE: A Disruption-Tolerant System for Studying Wildlife

Matthew Rutishauser,¹ Vladislav Petkov,¹ Jay Boice,¹ Katia Obraczka,¹ Patrick Mantey,¹ Terrie M. Williams,² and Christopher C. Wilmers³

¹ Department of Computer Engineering, University of California Santa Cruz, Santa Cruz, CA 95064, USA

² Department of Ecology & Evolutionary Biology, University of California Santa Cruz, Santa Cruz, CA 95064, USA

³ Department of Environmental Studies, University of California Santa Cruz, Santa Cruz, CA 95064, USA

Correspondence should be addressed to Vladislav Petkov, vladi@soe.ucsc.edu

Received 16 May 2010; Revised 7 September 2010; Accepted 22 September 2010

Academic Editor: Sergio Palazzo

Copyright © 2011 Matthew Rutishauser et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

We present CARNIVORE, a system for in situ, unobtrusive monitoring of cryptic, difficult-to-catch/observe wildlife in their natural habitat. CARNIVORE is a network of mobile and static nodes with sensing, processing, storage, and wireless communication capabilities. CARNIVORE's compact, low-power, mobile animal-borne nodes collect sensor data and transmit it to static nodes, which then relay it to the Internet. Depending on the wildlife being studied, the network can be quite sparse and therefore disconnected frequently for arbitrarily long periods of time. To support "disconnected operation", CARNIVORE uses an "opportunistic routing" approach taking advantage of every encounter between nodes (mobile-to-mobile and mobile-to-static) to propagate data. With a lifespan of 50–100 days, a CARNIVORE mobile node, outfitted on a collar, collects and transmits 1 GB of data compared to 450 kB of data from comparable commercially available wildlife collars. Each collar records 3-axis accelerometer and GPS data to infer animal behavior and energy consumption. Testing in both laboratory and free-range settings with domestic dogs shows that galloping and trotting behavior can be identified. Data collected from first deployments on mountain lions (*Puma concolor*) near Santa Cruz, CA, USA show that the system is a viable and useful tool for wildlife research.

1. Introduction

Known broadly as biotelemetry, remotely monitoring organisms have proved to be a powerful tool in understanding their physiology, behavior, and ecology [1]. Biologists have long recognized the need to study free-ranging animals in their natural environment. However, many species are cryptic and wide ranging, and thus difficult to monitor directly or capture for repetitive physiological measures. To overcome these challenges, biologists have long used VHF radio tracking [2] and archival data loggers on free-ranging animals [3].

New technologies have improved the effectiveness, efficiency, and ubiquity of biotelemetry. Increases in energy density of batteries and greater system miniaturization have allowed placement of VHF transmitters on the smallest mammals and large insects [4]. Researchers have also used the ARGOS satellite system for sensor data transmission, including highly accurate global positioning system (GPS)

locations. In addition, VHF or UHF radio modems are used to download data directly by the researcher. Unfortunately, ARGOS has very low data rate capabilities over a simplex data channel (1.5–7.2 kbits day⁻¹) [5]; radio modems have yet to be automated, requiring the researcher to manually download data, and while their range is large (around 10 km), their data rates are low (around 9.6 kbps).

Advances in wireless communications, VLSI, and Micro-electromechanical Systems (MEMSs) have enabled networks of low-cost, small form factor sensing devices which will bridge an important gap in the current biotelemetry state of the art. Due to their ability to sense, process, and communicate sensed data, sensor networks make sensed data readily available to scientists (and the community at large), in real time (or quasi real time) at low cost and with the required spatial and temporal resolution.

In this paper, we present the Carnivore Adaptive Research Network in Varied Outdoor Remote Environments (CARNIVORE), a sensor network system that specifically targets

wildlife monitoring (An earlier more condensed version of this work can be found in [6]). CARNIVORE was born out of an urgent need to gain deeper understanding of the interplay between predators, their ecosystem, and encroaching human populations. It is largely motivated by the ever-increasing expansion of urban development into wildlife habitats and illustrated by an increasing number of interactions between wildlife and humans [7]. Predators also can exert heavy pressure on their prey species, sometimes reshaping their own ecosystem [8, 9]. The extent of pressure a predator puts on prey is directly linked to its energetic requirements for survival and reproduction. A firm understanding of their physiology and energy budget calls for high-resolution behavioral and physiological data. This data can be difficult to collect for predators that are hard to capture and time consuming to monitor directly. Also, relatively rare but important events such as mating or consuming prey may be missed when animals are unobserved.

CARNIVORE's design was customized to fulfill the unique requirements imposed by wildlife monitoring applications including: energy efficiency, ability to operate with episodic connectivity, and reliability by being able to store data locally (when connectivity to the sink is unavailable). The resulting CARNIVORE monitoring network architecture consists of both mobile sensing and fixed relaying nodes which provide sensed data to biologists wirelessly, eliminating the need to recapture the predators. The net effect is considerable reduction of the delay between data collection and data delivery, and increased effectiveness of data collection.

The CARNIVORE mobile, animal-borne, sensing nodes, or CSNs are limited in weight yet contain the required sensors (3-axis accelerometer and GPS), processing, storage, and communications capability. Each CSN must be capable of providing data that will allow biologists to monitor the physiology and behavior of the target species. Of particular interest are their hunting habits and energetic costs. In order to accurately track the animal's energy budget, its behavior can be categorized into activities such as walking, running, sleeping, hunting, and feeding. Furthermore, the footfall frequency in any gait is obtained and can be used to calculate the expended energy. Acceleration data along three axes will be used to extrapolate behavior data such as activity and footfall pattern [10, 11]. After local as well as centralized processing at the information sink(s), raw data will be turned into behavior and energetics data. Coupled with GPS position fixes and time stamps, we will put this data in perspective against other factors in the ecosystem such as human populations, habitat types, and other animals of the same or different species.

Weight and power constraints have the biggest effect on design choices. With batteries as the single heaviest component, power is one of the system's most limited resources. Thus, communication, processing, sensing, and data storage must all be optimized to minimize energy consumption and extend the operating life of each node. Furthermore, CSNs' storage capability should be carefully provisioned so that the system can withstand operation

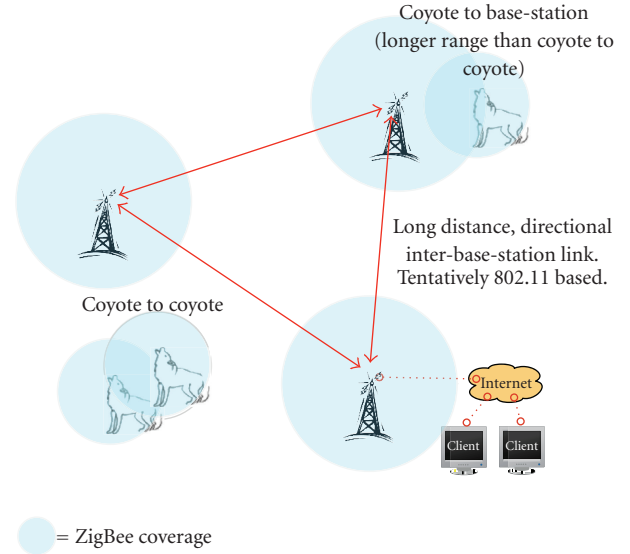


FIGURE 1: Overview of the CARNIVORE network. A predator, such as a coyote, wears a collar containing a CSN while fixed base stations or SRNs act as data sinks. CSN-to-SRN wireless range is greater than coyote-to-coyote wireless range because the base stations employ high-gain collinear antennas. An SRN has been developed for capturing data from CSNs; however, the final SRN has yet to be implemented to deliver data via the internet.

under episodic connectivity and still meet the specified data reliability requirements.

Coyotes (*Canis latrans*) were chosen as the first target species for developing the CARNIVORE network; however, the system is flexible enough to be used on a variety of species. The system is currently deployed on mountain lions (*Puma concolor*) in the Santa Cruz Mountains for first field testing. Here, we present early results from data collected on mountain lions. We also present results of further testing and analysis of the accelerometer data, GPS, firmware, network protocol, and power consumption. We will outline the entire system, focusing on the more important components. The first fully-functional version of the CSN was developed by Petkov [12]. This first version of the collar allowed for substantial testing of the system, especially with respect to the accelerometer and real-time system (RTS) firmware.

The design of the CARNIVORE network allows for opportunistic data flow between CSNs and from CSNs to SRNs (Figure 1). CARNIVORE static relay nodes (SRNs) communicate with CSNs in range and also with other SRNs providing wider-range network connectivity and conveying sensed data to the information sink(s). Although the bridge between the lower and upper tiers of the network has yet to be implemented, we anticipate unlimited power supplies and long-range communication links for these nodes. Wireless links between CSNs and CSNs-to-SRNs utilize the 802.15.4 MAC layer and a CARNIVORE-specific network protocol. The upper-tier links between SRNs have yet to be determined; however, 802.11, 900 MHz long-range links, or long-range ZigBee/802.15.4 are all possible choices.

2. Hardware

The CARNIVORE CSNs were designed from the ground up with the goal of maximizing battery life while meeting the application goals. Dictated by the CARNIVORE application requirements, the hardware specification for sensing and data storage of the CSN could not be met by existing solutions such as the Berkeley Mote platform [13–15]. Specifically, this platform was very early in its design when we began CARNIVORE and could not meet our requirements with respect to storage and low-power wireless. The components for the CARNIVORE platform were chosen to meet the sensor and long-lifespan requirements proposed by the biologists involved with the project (Figure 2). Components were chosen with low-power operation in mind to maximize collar lifespan and minimize weight through smaller batteries. The GPS provides location and velocity data while the accelerometer can provide data to monitor activity and behavior of the target animal. The MSP430 [16] provides a very good performance with respect to code memory, peripheral modules, and low-power operation. Individual modules can be turned off when not in use to minimize power consumption. The Lassen iQ GPS receiver and MMA7260Q accelerometer also have good performance from both a sensor data perspective and power consumption.

The deployed CSN (Figure 3) also included off-the-shelf components used to guarantee tracking and recovery of the CSNs in the event of a total system failure for first field deployments. The timed dropoff was made by SirTrack [17] and causes the collar to fall off the animal at a specified date and time. The VHF beacon was produced by Telemetry Solutions [18] and was used to locate collars at long range (0.1–20 km). Both devices had separate power supplies and were fully independent of the CARNIVORE system.

2.1. Transceiver. A major change in the current version of the system was the removal of the ZigBee transceiver and protocol stack in favor of a CARNIVORE-specific protocol. An early version of the CARNIVORE node [12] used the ETRX1 transceiver module with ZigBee protocol stack [19]. The ETRX1 utilized an Atmel Atmega 128 to implement the stack. The interface was unwieldy and the second microcontroller increased power consumption. By implementing a custom CARNIVORE network protocol and the 802.15.4 MAC layer on the MSP430, power consumption was reduced, the footprint of the radio was reduced, and data transfer rate was increased by reducing the network overhead.

The CC2420 and associated balun circuit were taken from an ember application note for a ZigBee communication module [20]. This design allowed for single-ended operation and a 50 Ω impedance which allows for several different antennas. Schematic and layout specification from the application note were followed precisely.

A folded-F printed circuit board (PCB) antenna was used to minimize the cost of the design [21]. Performance is comparable to surface-mount chip antennas. If the PCB size must be reduced for future designs, a chip-mount antenna can be used and easily incorporated.

2.2. Power Supply. By using 3.6 V Li batteries with a very flat voltage profile, no power regulation is required as all components are compatible with this voltage. Lithium batteries at 3.6 V are available in D, C, AA, and other sizes, and so this design will be able to accommodate a variety of form factors and sizes of batteries for small and large animals. This allowed for a design without voltage regulators, reducing power consumption because regulators have efficiencies less than 100%. Dual MOSFETs were used to control power to individual components, allowing them to be turned off individually when not in use.

3. Firmware

The firmware scheduler and framework [12] allowed for relatively easy modifications to the firmware even though these modifications were substantial during design iterations (Figure 4). Tasks are arranged in an array of function pointers, where each task is assigned a single element in the array. Tasks are started when interrupts add a task into the scheduler by inserting a function pointer into the high- or low-priority task arrays. For example, when a frame is received, an interrupt is raised which inserts a function pointer into the high-priority array to begin the state machine which processes frames. Each state in the state machine is a function where the function pointer for the next state is inserted into the array. When the task is done, a null pointer is inserted into the array so the task is no longer continued. Tasks in the low- and high-priority arrays are processed in a round-robin scheme. In each pass through the main loop, one function for each high-priority task is called while only one low-priority function is called. The network and MAC subsystems will be discussed in Chapter IV.

In the early design stages, we made a difficult decision between completely custom firmware and TinyOS [22]. A flexible embedded operating system such as TinyOS provides a modular interface between software and hardware and takes on the burden of managing system resources and scheduling execution—all desirable attributes.

However, a flexible OS comes with a price. For example, cpu cycles and memory need to be allocated to interprocess messages and operating system state variables. Each OS function must come at the expense of complexity (and thus increased power consumption). With the CARNIVORE CSNs, simplicity was chosen over flexibility to allow minimal power use and meet a design goal of 100 Hz accelerometer sampling. The system functions entirely around interrupt-based cues allowing it to meet its real-time requirements. A simple scheduler exists for those tasks that are too large to put inside an interrupt service routine and adds almost no overhead to the system.

3.1. Task Timers. Functions can be called at specified times in the future using the timer subsystem. This was needed for network and MAC protocols. For example, the 802.15.4 MAC protocol uses a random, exponential back-off scheme. Thus, when the channel is busy, the MAC layer must attempt to send the frame at the specified time in the future. Three

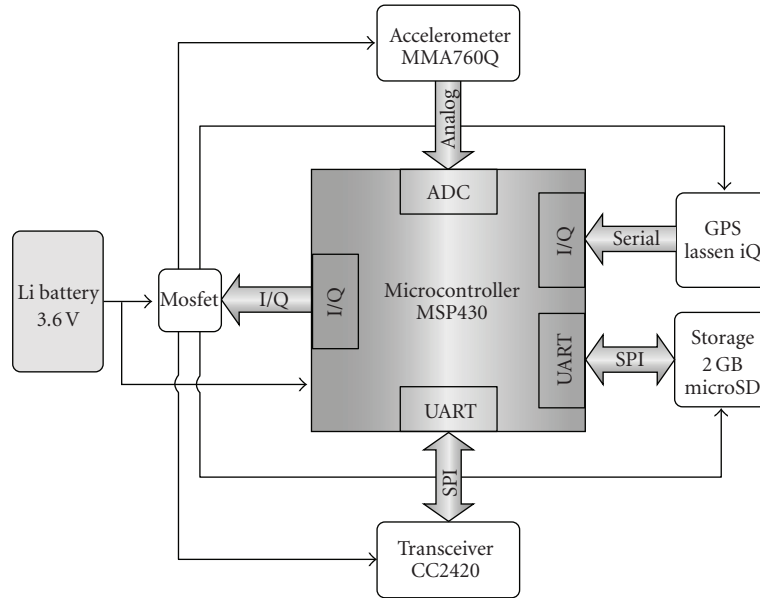


FIGURE 2: Top level block diagram of the CARNIVORE hardware. Black arrows indicate power connections. Thick shaded arrows indicate control and data connections.



FIGURE 3: Deployed CARNIVORE node. This collar was deployed on a mountain lion. The CARNIVORE electronics are above, D-cell battery and VHF beacon are lower right, and a timed dropoff (SirTrack [17]) is lower left. VHF antenna can be seen exiting the collar upper right. The VHF beacon and dropoff use separate power supplies from the CARNIVORE platform. Components were assembled by Telemetry Solutions.

separate task timers were implemented: a fine-scale task timer for the MAC layer, a task timer for the pseudorandom interval between neighbor discovery beacons, and a shared task timer for the election and file transfer timeouts. The last

task timer could be shared because these do not occur at the same time.

To initialize a task timer, a function pointer is pointed at the function to be called, the required counter value is stored in a capture-compare register, and the interrupt is enabled. When the system clock advances the counter to the required value, the function pointer is dereferenced and the specified function is called.

3.2. Data Storage. During initial debugging of the firmware, an FAT file system on the SD card was valuable for testing sensor data acquisition. However, troubleshooting file system errors became difficult to debug and the FAT file system was replaced by a system of FIFO queues on each CSN. Four queues are available so each data type (accelerometer and GPS) and data source (local or exotic) can be prioritized for forwarding through the network.

New data collected at the node or received from other nodes is enqueued at the tail of the appropriate queue. To allow for the multicopy forward routing (Section 4.5), data sent to other CSNs can be dequeued from the middle of a queue. Only when data is sent to base station is data dequeued from the head pointer. If the head pointer catches up to the middle pointer, the middle pointer is moved along with the head pointer. This allows for multiple copies to be forwarded through other CSNs to the base station while the originator of the data maintains a local copy for eventual download to the base station.

FIFO queues allowed for 512 byte data blocks to be the data segment routed through the network rather than entire files. The structure of these segments has a 3-byte header and a 509-byte payload (Figure 5). In the current implementation of the SRN, the FAT file system remains in use. Data is saved

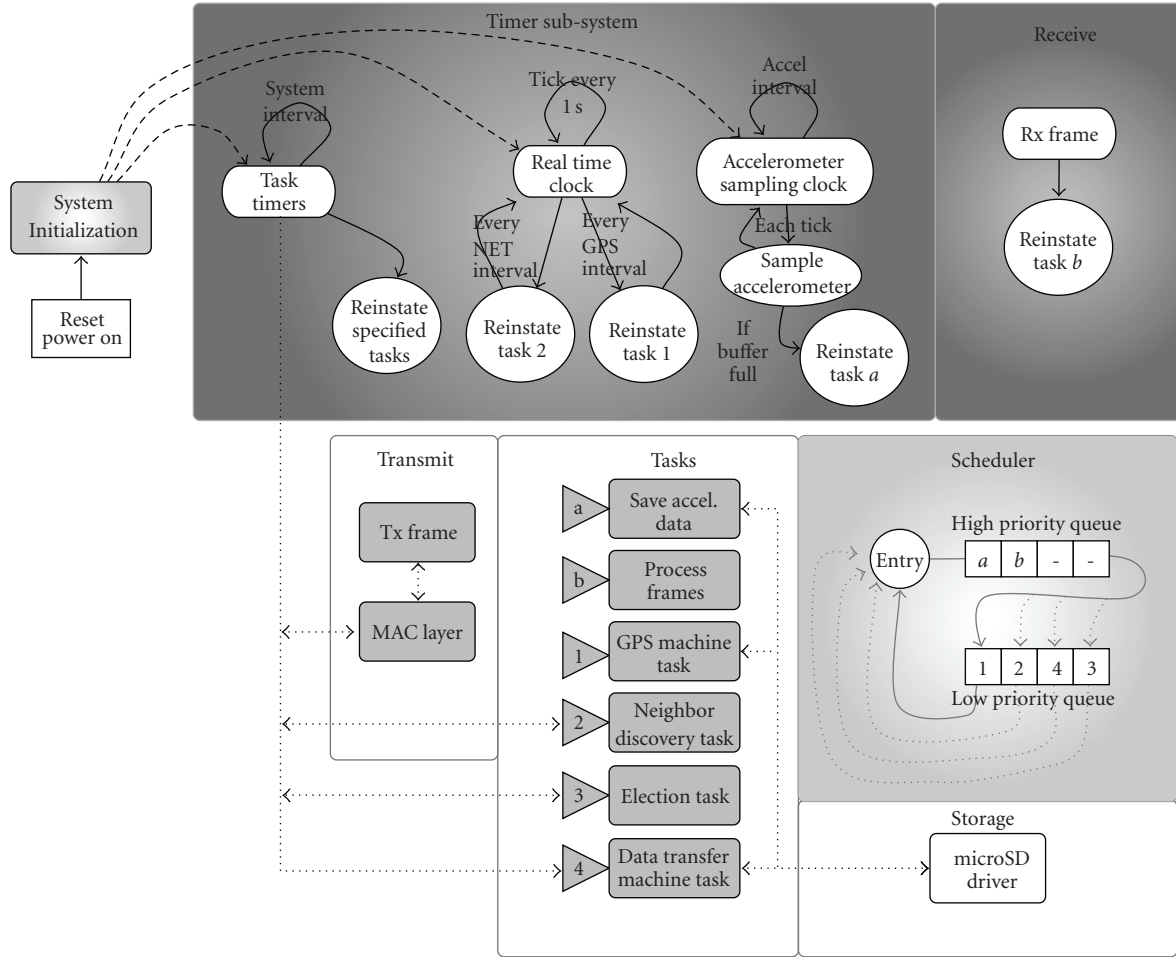


FIGURE 4: Top level block diagram of the CARNIVORE firmware.

in files which allow the microSD card to be easily accessed on a computer for parsing and analysis.

3.3. Receive Buffer. We implemented a high-priority task that processes frames and a receive buffer for incoming bytes. Incoming frames raise an interrupt which buffers the bytes and begins the task of processing frames.

3.4. Accelerometer Firmware. Timing information in the header for the accelerometer data allows for 1/1000th second accuracy for each accelerometer sample. Each accelerometer data segment contains 12 bytes of timing information and 110 3-axis accelerometer samples. The timing information in the header refers to the first accelerometer sample in the data segment. The 12-bit accelerometer data is packed in half bytes to fully utilize the memory space and data payload. At a user-defined interval, an interrupt triggers the capture of an accelerometer sample. Sampling rates of over 100 Hz were achieved while still meeting all timing requirements. Higher sampling rates translate into higher energy expenditure not only because the accelerometer is

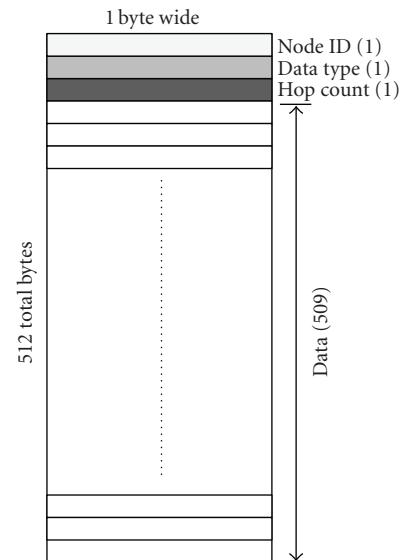


FIGURE 5: Collar data segment. These segments are stored in the FIFO buffers of the microSD card. Numbers in parentheses are bytes.

active for a larger percentage of time, but also because more data is generated and needs to be written to the SD card and eventually transmitted. The sampling frequency is a tunable parameter that can be set depending on the species being monitored, the capability of the system, and the requirements of the monitoring application (e.g., the fidelity needed by the scientist). We chose 60 Hz because it is large enough to capture the frequencies of walking, trotting, and galloping of our target species without aliasing effects.

3.5. GPS Firmware. The GPS firmware allows for network timing by updating the nodes system time and maintaining an accurate real-time clock for sensor sampling. In addition, the GPS firmware ensures that the almanac is always current. The Lassen iQ [23] on a cold start must download the satellite almanac, which describes current satellite locations. This requires 15 minutes of continuous signal from one satellite. Also, the almanac will expire after 8–10 weeks and require a new download. If the status packet from the GPS module indicates that the almanac is needed, the GPS timeout is increased to 18 minutes to allow for the download. Time, latitude, longitude, altitude, and velocity are recorded for each location and take up 30 bytes of space. 16 such locations can fit into one collar data segment (Figure 5). The firmware is capable of logging one location per second, but the energy cost of doing this is prohibitive. Commercial tracking collars available from Telemetry Solutions typically log anywhere from 1 to 48 locations per day. Depending on the species being tracked, biologists may be able to settle for lower temporal resolution on the location data. We chose to do 72 locations per day, giving us slightly higher temporal resolution.

4. Network Protocol

The CARNIVORE network can be considered to be a highly-disconnected network or a usually-disconnected network because predators wearing the CSNs are typically not within wireless range of each other. Timely or complete recovery of the data at a base station is not required; however, as much data as possible should be captured.

There are three tasks which set up the inter-CSN or CSN-to-SRN connections: neighbor discovery, election, and data transfer (Figure 6). Each of these utilizes the MAC layer to send and receive data. A single MAC layer task parses frames rapidly and updates the state variables for each task. A neighbor table is maintained at each CSN that stores the neighbor ID and a ranking metric. The complete CARNIVORE protocol requires six different CARNIVORE packet types (Table 1). When two or more nodes come together, they form a star-shaped network, where the central node is chosen to receive the data from all the other nodes (Figure 7). If present, an SRN is always chosen to receive data. The chosen receiver mediates the round-robin scheme and minimizes competition for the channel, giving each node a request for data in turn (see Sections 4.4 and 4.5).

TABLE 1: CARNIVORE frame types and size (including 802.15.4 header and footer).

Frame type	Size (Bytes)
Neighbor discovery beacon	14
Election nomination	12
Election accept	12
File transfer request data	12
File transfer data	98
File transfer end-of-data	12

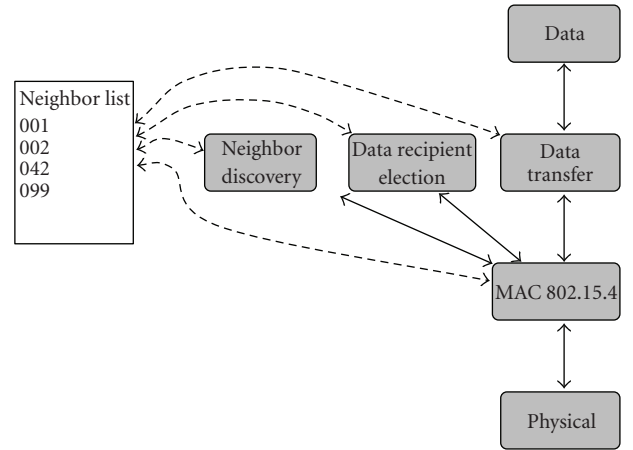


FIGURE 6: Network stack and associated data structure. The CARNIVORE stack uses a neighbor table to mediate the use of the wireless channel. The list is populated during neighbor discovery and updated by various layers. Received frames are processed in the MAC layer which then updates the neighbor list.

4.1. Disruption-Tolerant Routing. The low density of collared coyotes, the speed at which they can travel, and home ranges of 10–300 km² necessitate a disruption-tolerant data routing approach. In contrast to traditional routing protocols in which connectivity between any two nodes is generally assumed, a disruption-tolerant routing protocol must employ the long-term storage capabilities of each node to cooperatively route messages toward their destination (in this case, the SRNs).

An early approach to routing in such networks, Epidemic Routing [24], functions by replicating all messages to all nodes in the hope that one or more of the copies will reach the destination. More recent projects such as ZebraNet [25] and DieselNet [26] have explored routing between zebras and city buses, respectively. Research on Data MULEs [27] explores topologies in which sensors are static devices, and a mobile node (an MULE) provides connectivity to a destination node.

CARNIVORES present a unique networking challenge due to some of the characteristics of the collars, in particular, the large amount of storage space available in comparison to their limited bandwidth. Each CSN produces data at a rate of 2.1 kbps and can store 2 GB (approximately 88 days worth) of data. However, since it can be transmitted at a maximum rate of 63 kbps with relatively large power use compared to

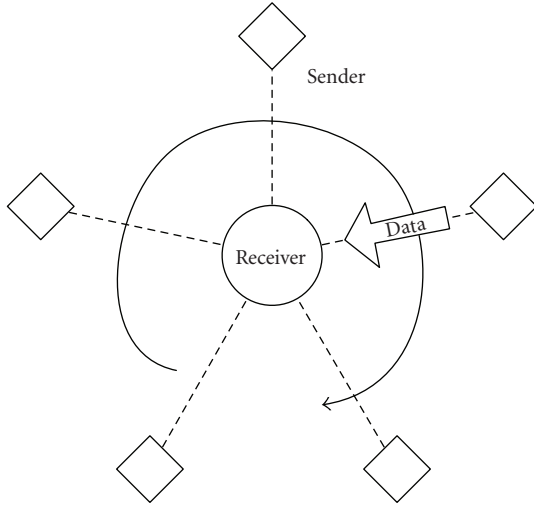


FIGURE 7: Round robin star network. The receiver mediates the round-robin data transfer, accepting data from the senders. Either sender or receiver can end the transfer.

base-line power use, care must be taken to use the available bandwidth efficiently.

Using the Qualnet [28] network simulator, we studied different data routing/forwarding algorithms. Results from this study (shown in Section 5.3) comparing epidemic, controlled epidemic, single-copy forwarding, and multicopy forwarding show that the latter delivers the best performance in terms of delivery ratio and bandwidth usage. In our multicopy forwarding, implementation CSNs send messages to those CSNs with a more recent time stamp from a sink. The source coyote (the one who produces the data) keeps the messages and will resend them again, though only directly to a base station. These messages are also marked in the buffer to be deleted first.

4.2. MAC Layer. The current version of the CARNIVORE CSN utilizes a custom network protocol stack and implements the 802.15.4 MAC layer [29]. The MAC layer uses CSMA/CA (Carrier Sense Multiple Access with Collision Avoidance). A node wishing to transmit listens to the channel. If the channel is clear, the node transmits. If the channel is busy, the node waits a random time and listens again. Each time the channel is busy, the node waits an exponentially increasing and random amount of time up to the maximum number of backoffs.

4.3. Neighbor Discovery. The first step in the network protocol is to wakeup synchronously, announce yourself, and find your neighbors (Figure 8). The GPS time signal keeps all nodes synchronized. Each node sends out nonacknowledged beacons to the broadcast address with their node ID and a metric to be used in the election process. The beacons are not acknowledged to prevent an ACK swarm. Fifteen beacons are sent out at pseudorandom intervals to minimize collisions and guarantee a large amount of overlap when nodes are sending beacons. Each received beacon updates the neighbor

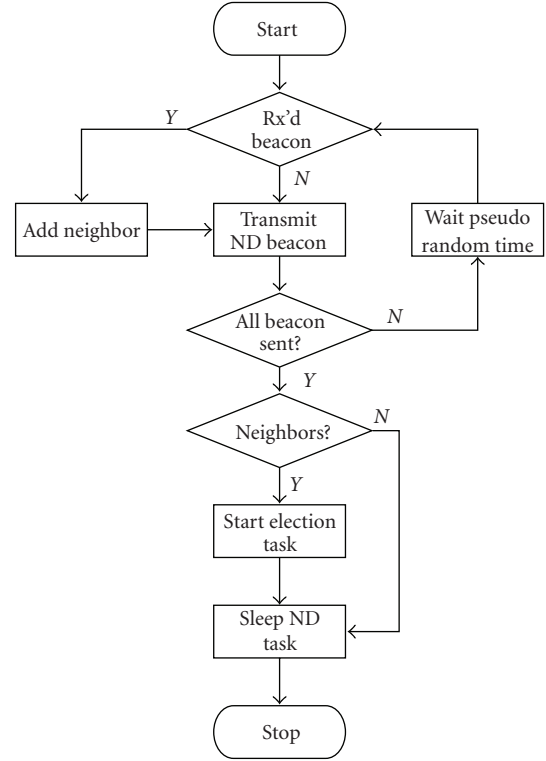


FIGURE 8: Neighbor discovery protocol. This task initiates wireless communication at a specified interval, synchronized by the GPS time signal. A specified number of beacons are sent at pseudorandom intervals to prevent contention for the channel. The beacons do not request acknowledgments.

list. If neighbors are found, this task puts itself to sleep and begins the election task.

4.4. Election of Data Recipient. In order to determine which node should receive data, a metric which correlates to likelihood of reaching an SRN is used. This type of routing is known as directed diffusion broadcast routing, where packets do not have a destination address and are simply forwarded along a direction or gradient most likely to result in delivery [30]. In the CARNIVORE network, the gradient is controlled by a saturating increasing counter that is reset to 1 whenever a node encounters an SRN. The node with the lowest metric has most recently visited a base station. And since nodes are on predators which likely have stereotypic behavior, this node should be the most likely to encounter a base station again.

Nodes choose the neighbor with the lowest metric to receive data (Figure 9). If their own metric is the lowest, they wait for a nomination. If they do not have the lowest metric, they send a nomination packet with an acknowledgment request to the node with the lowest metric. The nominee must send a nomination acceptance packet back for a link to be established. In this way, a hidden node will not disrupt the formation of a network (Figure 9). An ignored nomination will cause the nominating node to time out. It will not attempt to initiate another link until the next

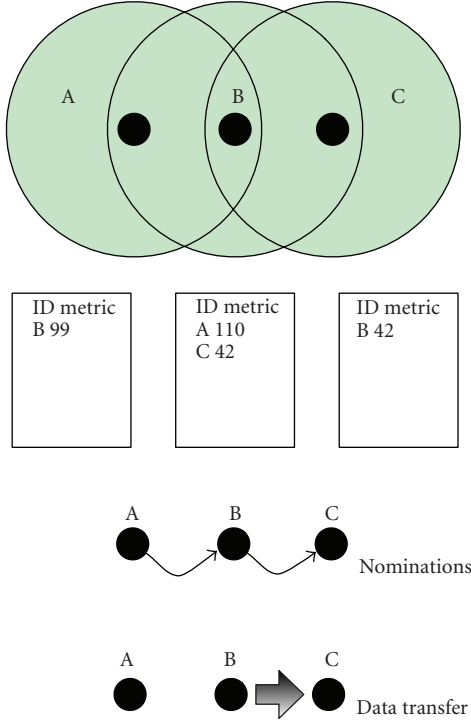


FIGURE 9: Hidden-station example. Radio range is shown by the shaded circles. Node B can communicate with A and C while A and C cannot communicate. After neighbor discovery, the neighbor tables are filled as shown. A nominates B, B nominates C, and C nominates itself in the election. B ignores A's nomination and A times out. C accepts B's nomination. B then sends data to C, and A does not transmit any data during this network wakeup.

network wakeup. Also, a node waiting for nominations but receiving none will also time out and must wait until the next network wakeup. A nominee becomes the receiver in the data transfer task. All nodes that sent nominations and received acceptances become senders in the data transfer task. SRNs always have a metric of 0 and will therefore always win an election and act as receivers.

4.5. Data Transfer. Simulation of data forwarding in the CARNIVORE network (more extensively discussed in Section 5.3) showed that a multicopy-forward scheme performed the best with respect to delivery success and minimizing total transmissions but at the cost of buffer space. Since we are using 2 GB microSD cards, buffer space is not a problem, and this strategy was chosen. In multicopy forward, a copy of data is stored locally on the generating node, and a single copy is forwarded through the network. This part of the CARNIVORE network protocol, as well as data prioritization, is accomplished when a sending node chooses which data to send.

The receiver first checks if it has room for any more data. If yes, the receiver sends a data request and starts a short time-out. Upon receipt of the data, the receiver moves onto the next node and requests data. If a time-out occurs or an end-of-data packet is received, that neighbor is removed

TABLE 2: Deployed firmware settings and battery power.

Component	Value
1 Li D-Cell	19 Ah
GPS sampling interval	20 minute
Accelerometer sampling rate	60 Hz
Network wakeup interval	5 minute
Estimated lifespan	100 days

from the neighbor list. The receiver limits each node to sending a maximum number of data segments such that the round robin will end before the next network wakeup. The receiver terminates a link with a node by not sending a data request and letting that node time out.

The sender during data transfer sets a long time-out and waits for a data request from the receiver. This long time-out allows for one complete round robin with the maximum number of nodes in the round robin. Once a data request is received, the node picks a data type to send. If no data of any kind is available, the sender sends an end-of-data packet to terminate the transfer. If the node has data to send, it fragments the 512-byte data segment into 6 packets to accommodate the 128-byte maximum data size specified by the 802.15.4 standard. These packets are then sent with the *ACK request* bit set in their 802.15.4 frames, causing the receiver to send an acknowledgement automatically upon proper reception. If a transmission fails, the FIFO queue is restored and the transfer is ended.

5. Experiments and Results

5.1. Power. Current consumption was measured for hardware components using a 1Ω current sense resistor and a Tektronix TDS3054C oscilloscope. Temporary changes were made to the firmware to enable or disable various components of the system. Voltage across the resistor was measured and converted to current using Ohm's law (Tables 3 and 5). In addition, the amount of time in which each module was active was measured with the oscilloscope or calculated from firmware settings. These values could then be used to calculate the expected lifetime of a CSN given a battery with a specified Ah rating using the following (Table 2):

$$L = \frac{A}{24 * \sum_{i=1}^C c(i) * p(i)}, \quad (1)$$

where L is the CSN lifetime in days, C is the number of components, $c(i)$ is a components current consumption in mAh, $p(i)$ is a components percent of time consuming current, and A is the mAh rating of the battery.

To confirm this method of estimating lifespan, we performed an accelerated power test. We modified the settings of a CSN and used 2 AA Li 1.5 V batteries to power the CSN (Table 4). This produced a much greater total power consumption (Table 5) and allowed us to drain the batteries in a relatively short-time period, confirming our estimation method. We predicted that the CSN would last 3.3 days.

TABLE 3: Measured power consumption and percent time active per component for the deployed system.

Component	Current drain (at 3.6 V)	Percent time active
Transceiver	23.0 mA	1.0%
GPS	41.4 mA	3.8%
GPS SD card access	22.5 mA	<0.1%
μ C and accelerometer	5.8 mA	100.0%
Accelerometer SD card access	25.0 mA	1.4%
AVERAGE	7.9 mA	

TABLE 4: Accelerated power test firmware settings and battery.

Component	Value
2 Li AA-cell	3 Ah
GPS sampling interval	60 s
Accelerometer sampling rate	60 Hz
Network wakeup interval	100 second
Estimated lifespan	3.3 days
Achieved lifespan	3.4 days

TABLE 5: Measured power consumption and percent time active per component for the AA battery test.

Component	Current drain (at 3.6 V)	Percent time active
Transceiver	23.0 mA	3.6%
GPS	41.4 mA	75.0%
GPS SD card access	22.5 mA	<0.1%
μ C and accelerometer	5.8 mA	100.0%
AccelerometerSD card access	25.0 mA	1.4%
AVERAGE	38.0 mA	

From the GPS and accelerometer data logged by the CSN, We found that the actual lifespan was 3.4 days.

5.2. Wireless Radio Link. We performed a variety of range tests in an open field with waist- to head-high vegetation. By using specialized firmware, we were able to record the success rate of frames sent between nodes. Figure 10 shows that CSN-to-CSN communication performs reasonably well through and over vegetation. In our first deployment on mountain lions, biologists will approach the animal and manually download data using a hand-held SRN. Thus, maximum range is needed. We equipped an SRN with a 12 dBi high-gain directional antenna and saw a much improved range for the CSN-to-SRN. An extended range of approximately 150 m proved adequate to approach a mountain lion and download data from its CSN.

Sensor data was transferred between collars less than 10 m apart at 63 kbps. This figure does not include network overhead. This data rate is approximately 30 times the rate at which data is collected by a CSN sampling the accelerometer

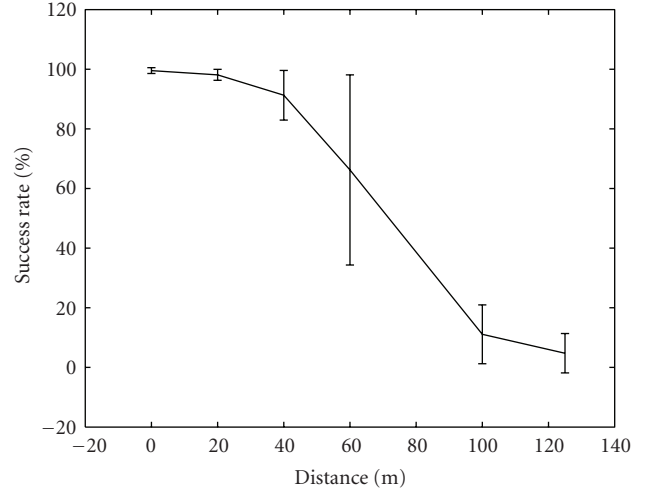


FIGURE 10: CSN-to-CSN range test. This test was conducted across a field with waist-high vegetation. Both collars were elevated 2 m. Bars indicate one standard deviation.

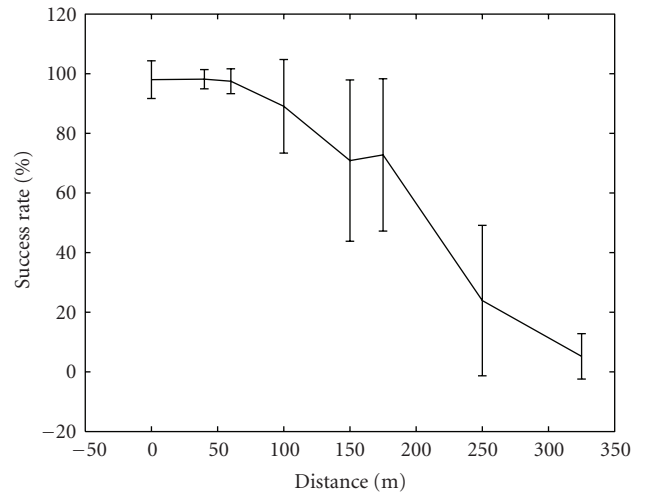


FIGURE 11: CSN-to-SRN station range test. This test was conducted across a field of waist-high vegetation. The base station was equipped with a high-gain (12 dBi) directional antenna. Both nodes were elevated 2 m. Bars indicate one standard deviation.

at 60 Hz. Thus, a CSN needs only to spend 1/30 of its time near a SRN to download all its data.

5.3. Network Simulation. We considered four routing methods with varied degrees of message replication and evaluated each in a network simulation. We assume that messages are buffered in a FIFO queue with older messages being transmitted first.

Epidemic. Starting with the head of the FIFO buffer, send all messages to all neighbors. Each coyote records the neighbors to which it sent a message so they are not retransmitted.

TABLE 6: Delivery rates.

Routing Protocol	Delivery (%)
Epidemic	13.83
Controlled Epidemic	17.11
Single Copy	21.41
Multicopy	23.71

Controlled Epidemic. Similar to Epidemic, except that a coyote only sends messages to those coyotes who have more recently been in contact with a base station. The sending coyote keeps the messages and will send them again to other coyotes if the opportunity arises.

Single Copy. Coyotes send messages only to coyotes with a more recent time stamp from a sink then delete the messages from their own buffer.

Multicopy Forwarding. Coyotes send messages to those coyotes with a more recent time stamp from a sink. The source predator (the one who produces the data) keeps the messages and will resend them again, though only directly to a base station. These messages are also marked in the buffer to be deleted first.

Although studying the mobility of predators in their native habitat is one of the goals of the sensor network, we generated a simple model to evaluate our proposed routing protocols. We chose to simulate the network with a relatively social predator, the Coyote (*Canis latrans*) to allow for both CSN-CSN and CSN-SRN data transfer. A Qualnet [28] simulation model was run for seven days of real time with 16 collared coyotes and four randomly placed base stations in an area of 64 square kilometers. The simulation was run with 10 random seeds for den location, SRN location, and coyote movement. The results were averaged over the 10 seeds. Each coyote is assigned a den location to which it returns every eight hours; there is an average of two coyotes assigned to each location. During the remaining time, the coyotes move randomly around their home within a maximum radius of 2 kilometers. Collared coyotes therefore have a population density of 0.25 coyotes km^{-2} . Assuming that 25% of all coyotes in a study area were collared, a reasonable estimate of capture success, our total simulated population was 64 coyotes at 1 coyote km^{-2} . This is a typical population density for coyotes whose population densities range from 0.2 to 2.3 coyotes km^{-2} [31].

Delivery rate, as a percentage of of data packets successfully delivered to a base station, varied widely between protocols (Table 6). The performance of epidemic routing suffers since a large amount of bandwidth is wasted retransmitting packets that may have already been successfully delivered. Multicopy Forwarding notably performs better than the Single-Copy approach, showing that nodes sometimes needlessly transmit data to neighboring coyotes instead of storing them until a base station is near.

Table 7 shows the average amount of time between data production and delivery. Again, Multicopy Forwarding

TABLE 7: Delivery delay.

Routing Protocol	Delay (Hours)
Epidemic	15.62
Controlled Epidemic	12.73
Single Copy	11.38
Multicopy	10.49

TABLE 8: Bandwidth consumption.

Routing Protocol	Bandwidth (Bps)
Epidemic	205.41
Controlled Epidemic	165.47
Single Copy	123.02
Multicopy	139.36

shows the best performance, as the additional message copy enables coyotes to make direct deliveries to a base station and reduce the amount of time messages spend in transit. The Epidemic and Controlled Epidemic protocols both result in high delays because much of the available transmission time is consumed by duplicate messages.

With respect to bandwidth consumed per coyote, Single Copy forwarding proved to be the better choice (Table 8). It is important to note that during much of the simulation, coyotes are not within the range of each other and therefore do not consume any bandwidth. Epidemic routing, as expected, consumes most of the bandwidth, even though this does not correlate to the highest delivery rate. Notably, Multicopy Forwarding consumes more bandwidth than the Single Copy strategy due to direct communication. While this results in a higher delivery ratio with lower delay, it would also result in a higher rate of energy consumption but less than Epidemic and Controlled Epidemic.

5.4. Data Collection Trials with Domestic Dogs. In addition to accelerometer data collected with human trials, we used domestic dogs on a treadmill (Figure 12) and running next to an electric cart. We analyzed this data to verify that stride frequency observed in video recordings of these trials matched the frequencies found in accelerometer data. In addition, we confirmed that frequency is correlated to speed for different gaits as was shown by Heglund [32] (Figure 13). This shows that the speed of the collared predator can be determined from the accelerometer record if gait and stride frequency can be identified.

5.5. AMDF Analysis. Much of the behavioral analysis of the recorded accelerometer data remains as future work, but we did some preliminary analysis using the average magnitude difference function (AMDF), which allows us to determine the gait and stride frequency of an animal from the accelerometer record as follows:

$$\text{AMDF}(t) = \frac{1}{L} \sum_{i=1}^{L-t} |s(i) - s(i-t)|. \quad (2)$$



FIGURE 12: Pippin on the treadmill with Mary Zavannelli holding his leash and giving him encouragement.


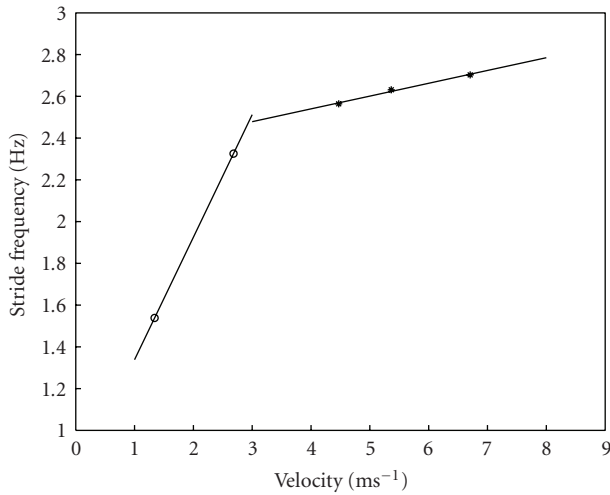



FIGURE 13: Stride frequency and velocity of Pippin. Circles indicate a walking gait, and asterisks indicate a galloping gait. Lines indicate best-fit linear regression for each gait.

In (2), t is the period in seconds, L is the window size of the data to be examined, and $s(i)$ is a normalized sample [33]. Periodicity in the signal is identified by minimums in the AMDF function. We chose this function because it can be computed with integer calculations, primarily multiplications, and a minimum of division operations. Looking to the future where behavior may be identified in real time on CSN, the AMDF function is a good candidate for an MSP430-based embedded system with a hardware multiplier.

Using the AMDF function to analyze data from several trials of Pippin that were also video taped, we were able to confirm that stride frequency and gait can be determined from the accelerometer data (Figure 14). There are two obvious characteristics of the AMDF function that differentiate walking from galloping. The first is the shape of the axis identified by a plus sign. Its shape is very different between galloping and walking. Furthermore, the amplitude of the AMDF function is much larger when Pippin is galloping. By

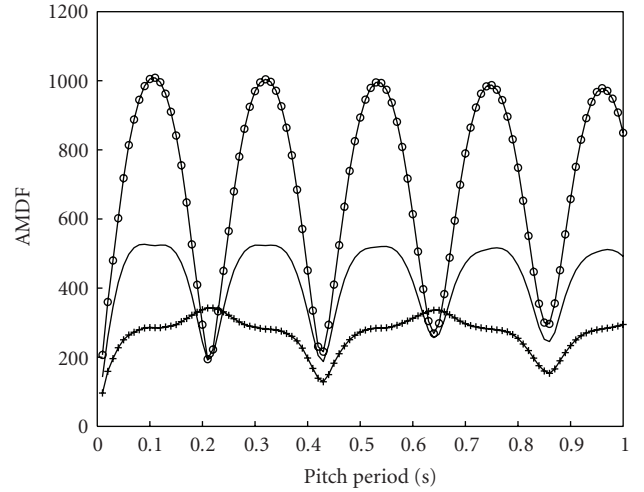

(a) Pippin walking on the treadmill at 6 mph.

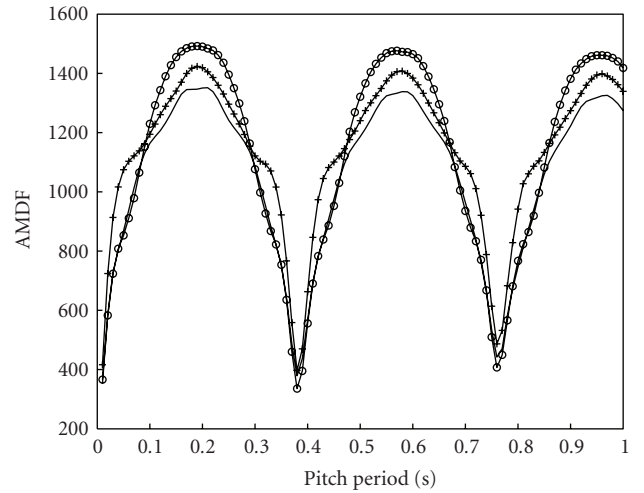

(b) Pippin galloping next to the cart at 12 mph.

FIGURE 14: AMDF functions for accelerometer trials with pippin.

comparing the observed stride frequency from the video to the AMDF function, it appears that the first minimum shared by all 3 axes is the stride frequency of the gait.

To further examine the usefulness of the AMDF function, we analyzed accelerometer data from a human running with the collar (Figures 15, 16, and 17). As with Pippin amplitude, differences between walking and running would allow for identification of these gaits. Furthermore, the pitch where all three axes are at a first minimum accurately shows 1/2 the stride period for walking or running. The first minimum shows every footfall: right-left-right-left. The second minimum identifies every other footfall: right-right-right-right or left-left-left-left. These pitches match the observed stride frequency for running and walking of the researcher. Also note that running in sand shows an asymmetric foot-fall pattern, where the second minimum is more pronounced than the first.

The main goal for the accelerometer data is to provide the energy budget for the animal being monitored. The

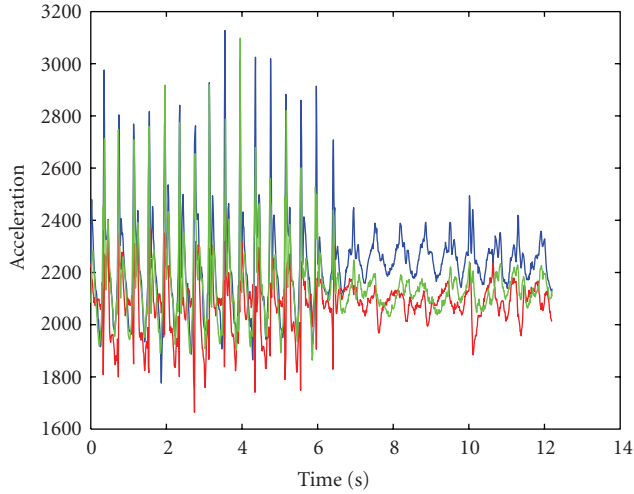


FIGURE 15: Raw accelerometer data of transition from running (left) to walking (right).

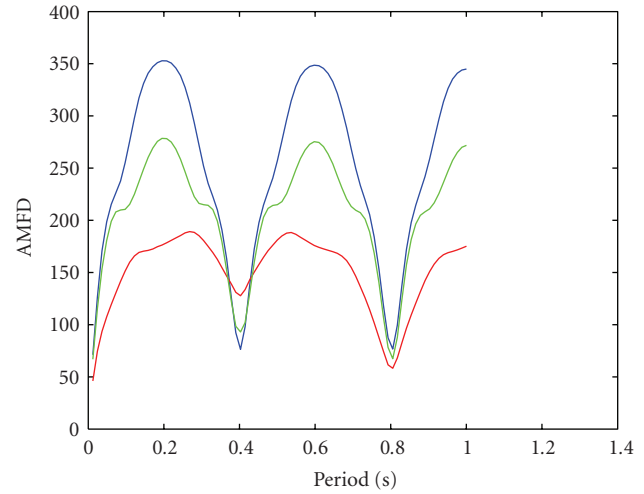


FIGURE 17: AMDF of accelerometer data during running.

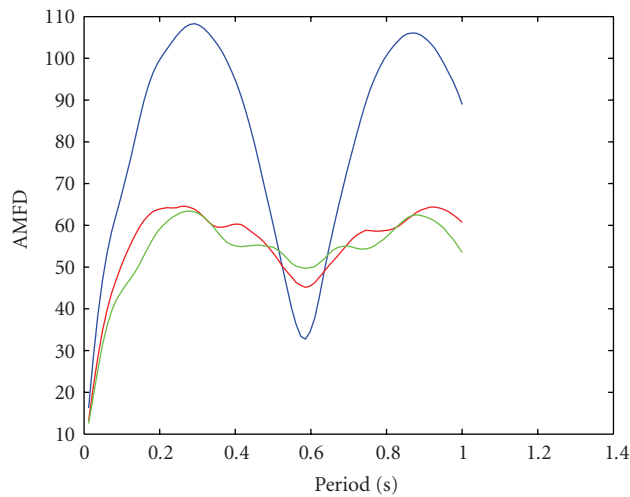


FIGURE 16: AMDF of accelerometer data during walking.

stride frequency of the animal largely determines the animal's energy expenditure. In order to track energy intake as well, more subtle behaviors such as consumption of nourishment and sleep must be identifiable. The AMDF analysis can be used towards computing stride frequency, but for identifying the more subtle behaviors, a pattern matching approach will most likely be necessary.

5.6. Test Deployment. In order to test the deployed system, a network of three nodes was setup. A domestic dog and a human carried CSNs and a single SRN was placed at Long Marine Lab, Santa Cruz, CA, USA (Figure 18). Data was successfully transferred between all CSNs to the SRN, both directly and indirectly through an intermediate node.



FIGURE 18: GPS data from the test deployment. The yellow track was logged by the GPS on a CSN carried by a researcher. The black track is the GPS data from the CSN carried by a domestic dog. An SRN was located at Long Marine Lab, Santa Cruz, CA, USA (A). The dog lived at B and his owner worked at A. Data was successfully transferred to the SRN via hops 1 and 2.



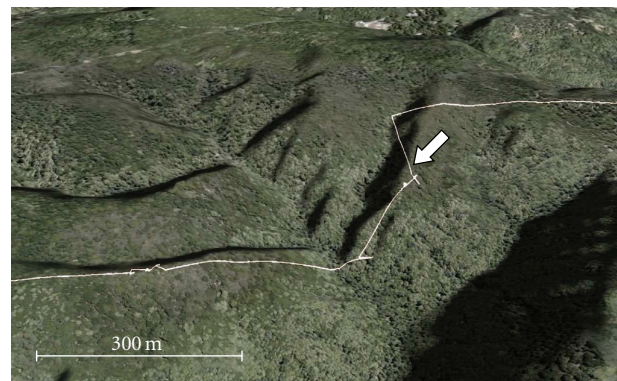


FIGURE 19: Subset of mountain lion GPS data. This data was collected on October 17, 2008 from a CSN on a mountain lion in the Santa Cruz Mountains, CA, USA. Arrow indicates an event with periodic accelerometer data. See Figure 20.

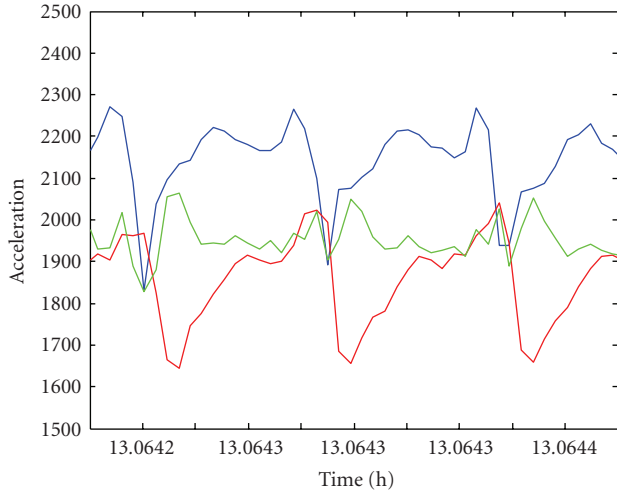

(a) Raw accelerometer data.

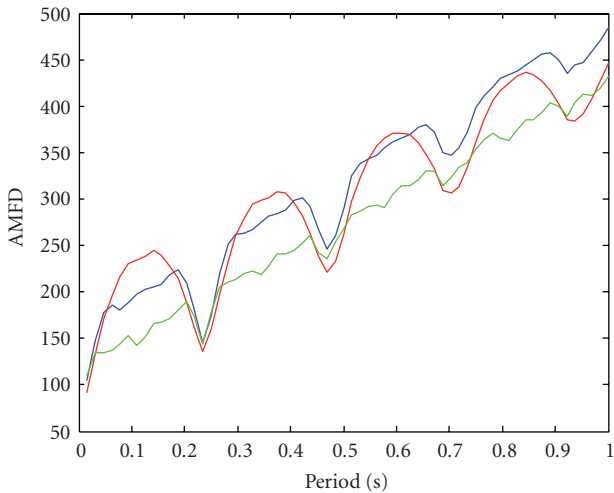

(b) AMDF.

FIGURE 20: Accelerometer data and AMDF analysis of mountain lion data since October 17, 2008. Time is hours since midnight GMT. See Figure 19 for the location, where the data was recorded.

5.7. Deployment on Mountain Lions. In the fall of 2008, the CARNIVORE system was deployed on mountain lions (*Puma concolor*) in the Santa Cruz Mountains, CA, USA. To date, we have deployed 3 collars and have collected 15 days of accelerometer and GPS data from one collar. Because mountain lions range widely, a portable SRN was used to download data from the mountain lion. A researcher tracked the animal with the VHF beacon and then downloaded the data. Early analysis of both GPS (Figure 19) and accelerometer data (Figure 20) indicates that both location and acceleration data for the animals is successfully being recorded. An important next step in the development of the system is to observe the mountain lions carrying CSNs in order to correlate the accelerometer record with specific behaviors.

6. Related Work

Current wildlife telemetry technology from companies such as Telemetry Solutions, Vectronic Aerospace, Lotek, and ATS does not allow for remote recovery of high-bandwidth sensor data. They also do not support networking among collars. Remote download of GPS data is available, but the radio links used would not accommodate the large amounts of data the CARNIVORE platform records. Cellular GSM technology is also used and has a higher data rate. But GSM modems require cellular infrastructure; the modems use more power and still do not have a high enough data rate. These off-the-shelf solutions only satisfy the requirements for downloading relatively tiny amounts of GPS or other data.

The only comparable system with intercollar networking capability is ZebraNet [25]. It allowed for internode routing of data to a base station. Their collars were much larger than CARNIVORE collars, weighing 1151 g compared to 450 g for the collar designed for mountain lions. Such a large collar would be unsuitable for many terrestrial predators and would not support high data rate sensors.

Compared to commercially available wildlife tracking collars that allow for remote download, the CARNIVORE platform can deliver a much greater quantity of data. A state-of-the-art GPS tracking collar of similar weight to the CARNIVORE collar with remote download (Quantum 5000-Telemetry Solutions [18]) can record and transmit 15,000 locations over its lifetime. At 30 bytes per location, this is 450 kB of data compared to 1 GB of data for the CARNIVORE platform.

7. Conclusion

The early results from deployments on Mountain Lions indicate that the CARNIVORE is a viable research tool. Furthermore, system tests prior to deployment and this first field test show that CARNIVORE is a viable option to gather data in a highly-disconnected system. At under \$1000 per CSN, compared to \$2 – 4000 for commercial collars, the CARNIVORE network will prove to be a valuable and affordable tool for wildlife biologists to ask and answer interesting questions about cryptic predators.

As future work, there are several areas for improvement in future versions of the CARNIVORE platform. First, power consumption can be further reduced by putting the MSP430 into a low-power mode as much as possible. This would dramatically reduce the baseline power consumption to a fraction of current values. Second, the SRN node needs to be developed as a bridge between the CSNs and the internet to allow for automated collection of data to a central database. Third, simulation of the implemented CARNIVORE network protocol is needed to identify shortcomings and optimize network parameters. Fourth, more sophisticated algorithms need to be studied to enable behavior extraction from the raw data. Finally, we need to conduct observations of mountain lions carrying CSNs in order to create correlations between specific behaviors and accelerometer signals and provide sufficient data for testing and selecting behavior-identifying algorithms.

Acknowledgments

Funding for this work was provided by the Institution for Innovation in Environment Research: Science, Technology, Policy, Society (STEPS) and the Center for Information Technology Research in the Interest of Society (CITRIS). Pippin, our research dog, was invaluable in assessing the performance of the collar. Pippin's training to run on a treadmill and next to the electric cart is owed entirely to Mary Zavaneli. Telemetry Solutions graciously helped in the final encapsulation and assembly of the collar. The work presented here was conducted under the Chancellor's Animal Research Committee (U.C. Santa Cruz IACUC) Protocol Will05.02.

This work has been partially supported by NSF grants 0963022, 0729707 and 0713994.

References

- [1] S. J. Cooke, S. G. Hinch, M. Wikelski et al., "Biotelemetry: a mechanistic approach to ecology," *Trends in Ecology & Evolution*, vol. 19, no. 6, pp. 334–343, 2004.
- [2] J. S. Hammerslough and R. G. Bjorklund, "Radio tracking of prematurely dislodged nestling herons," *Jack-Pine Warbler*, vol. 46, no. 2, pp. 57–61, 1968.
- [3] G. L. Kooyman, "Techniques used in measuring diving capacities of weddell seals," *Polar Record*, vol. 12, pp. 391–394, 1965.
- [4] B. Naef-Daenzer, D. Fröh, M. Stalder, P. Wetli, and E. Weise, "Miniaturization (0.2 g) and evaluation of attachment techniques of telemetry transmitters," *Journal of Experimental Biology*, vol. 208, no. 21, pp. 4063–4068, 2005.
- [5] "Basic Description of the Argos System," Service Argos, Inc., 2005, <http://www.argosinc.com/documents/sysdesc.pdf>.
- [6] M. Rutishauser, V. V. Petkov, T. Williams et al., "Carnivore: a disruption-tolerant system for studying wildlife," in *Proceedings of 19th International Conference on Computer Communications and Networks*, August 2010.
- [7] R. M. Timm, R. O. Baker, J. R. Bennett, and C. C. Coolahan, "Coyote attacks: an increasing suburban problem," in *Transactions, North American Wildlife & Natural Resources Conference*, vol. 69, pp. 47–57, 2004.
- [8] M. L. Pace, J. J. Cole, S. R. Carpenter, and J. F. Kitchell, "Trophic cascades revealed in diverse ecosystems," *Trends in Ecology & Evolution*, vol. 14, no. 12, pp. 483–488, 1999.
- [9] J. A. Estes, K. Crooks, and R. Holt, "Ecological role of predators," in *Encyclopedia of Biodiversity*, S. A. Levin, Ed., pp. 857–878, Academic Press, San Diego, Calif, USA, 2001.
- [10] R. Kram and C. R. Taylor, "Energetics of running: a new perspective," *Nature*, vol. 346, no. 6281, pp. 265–267, 1990.
- [11] R. M. Alexander and R. F. Ker, "Running is priced by the step," *Nature*, vol. 346, no. 6281, pp. 220–221, 1990.
- [12] V. Petkov, *Design and implementation of the carnivores monitoring network*, M.S. thesis, University of California, Santa Cruz, Calif, USA, March 2006.
- [13] S. Shukla, N. Bulusu, and S. Jha, "Cane-toad monitoring in kakadu national park using wireless sensor networks," in *Proceedings of the Asia Pacific Advanced Network Conference (APAN '04)*, Cairns, Australia, July 2004.
- [14] A. Mainwaring, J. Polastre, R. Szewczyk, D. Culler, and J. Anderson, "Wireless sensor networks for habitat monitoring," in *Proceedings of the 1st ACM International Workshop on Wireless Sensor Networks and Applications*, pp. 88–97, September 2002.
- [15] Crossbow technology, Inc, <http://www.xbow.com/>.
- [16] *MSP430x1xx Family User's Guide (SLAU049D)*, Texas Instruments, 2004.
- [17] S. W. T. Solutions, "Sirtrack wildlife tracking solutions," <http://www.sirtrack.com/>.
- [18] Telemetry Solutions, "Gps collars and gps backpacks for wildlife tracking," <http://www.telemetrysolutions.com/1280/wildlife-gps-collars.php>.
- [19] *ETRX1 (ZigBee Ready) Module Product Manual*, Revision 1.09 ed., Telegesis, 2005.
- [20] Ember, "Design of an ieee 802.15.4-compliant, embernet™-ready or emberznet™-ready communication module using the em2420 radio frequency transceiver," Ember Corporation, Application Note 0057, 2005.
- [21] A. Andersen, "2.4 ghz inverted f antenna," Chipcon Products from Texas Instruments, Application Note, 2007.
- [22] J. Hill, R. Szewczyk, A. Woo, S. Hollar, D. E. Culler, and K. S. J. Pister, "System architecture directions for networked sensors," in *Architectural Support for Programming Languages and Operating Systems*, pp. 93–104, 2000.
- [23] *Lassen iQ GPS Receiver System Designer Reference Manual*, Revision a ed., Trimble, February 2005.
- [24] A. Vahdat and D. Becker, "Epidemic routing for partially connected ad-hoc networks," 2000.
- [25] P. Juang, H. Oki, Y. Wang, M. Martonosi, L.-S. Peh, and D. Rubenstein, "Energy-efficient computing for wildlife tracking: design tradeoffs and early experiences with ZebraNet," in *Proceedings of the 10th International Conference on Architectural Support for Programming Languages and Operating Systems (ASPLOS '02)*, pp. 96–107, San Jose, Calif, USA, October 2002.
- [26] J. Burgess, B. Gallagher, D. Jensen, and B. N. Levine, "Max-Prop: routing for vehicle-based disruption-tolerant networks," in *Proceedings of the 25th IEEE International Conference on Computer Communications (INFOCOM '06)*, April 2006.
- [27] R. Shah, S. Roy, S. Jain, and W. Brunette, "Data mules: modeling a three-tier architecture for sparse sensor networks," in *Proceedings of the 1st International Workshop on Sensor Network Protocols and Applications*, pp. 30–41, 2003.
- [28] S. N. Technologies, "Qualnet," <http://www.scalable-networks.com/>.
- [29] IEEE, "Ieee 802.15 wpan task group 4 (tg4)," <http://www.ieee802.org/15/pub/TG4.html>.
- [30] D. Estrin, R. Govindan, J. Heidemann, and S. Kumar, "Next century challenges: scalable coordination in sensor networks," in *Proceedings of the International Conference on Mobile Computing and Networking (MOBICOM '99)*, pp. 263–270, 1999.
- [31] F. F. Knowlton, "Preliminary interpretations of coyote population mechanics with some management implications," *Journal of Wildlife Management*, vol. 36, no. 2, pp. 369–382, 1972.
- [32] N. C. Heglund and C. R. Taylor, "Speed, stride frequency and energy cost per stride: how do they change with body size and gait?" *Journal of Experimental Biology*, vol. 138, pp. 301–318, 1988.
- [33] K. Sayood, *Introduction to Data Compression*, Morgan Kaufmann, San Francisco, Calif, USA, 3rd edition, 2005.



Preliminary call for papers

The 2011 European Signal Processing Conference (EUSIPCO-2011) is the nineteenth in a series of conferences promoted by the European Association for Signal Processing (EURASIP, www.eurasip.org). This year edition will take place in Barcelona, capital city of Catalonia (Spain), and will be jointly organized by the Centre Tecnològic de Telecomunicacions de Catalunya (CTTC) and the Universitat Politècnica de Catalunya (UPC).

EUSIPCO-2011 will focus on key aspects of signal processing theory and applications as listed below. Acceptance of submissions will be based on quality, relevance and originality. Accepted papers will be published in the EUSIPCO proceedings and presented during the conference. Paper submissions, proposals for tutorials and proposals for special sessions are invited in, but not limited to, the following areas of interest.

Areas of Interest

- Audio and electro-acoustics.
- Design, implementation, and applications of signal processing systems.
- Multimedia signal processing and coding.
- Image and multidimensional signal processing.
- Signal detection and estimation.
- Sensor array and multi-channel signal processing.
- Sensor fusion in networked systems.
- Signal processing for communications.
- Medical imaging and image analysis.
- Non-stationary, non-linear and non-Gaussian signal processing.

Submissions

Procedures to submit a paper and proposals for special sessions and tutorials will be detailed at www.eusipco2011.org. Submitted papers must be camera-ready, no more than 5 pages long, and conforming to the standard specified on the EUSIPCO 2011 web site. First authors who are registered students can participate in the best student paper competition.

Important Deadlines:



Proposals for special sessions	15 Dec 2010
Proposals for tutorials	18 Feb 2011
Electronic submission of full papers	21 Feb 2011
Notification of acceptance	23 May 2011
Submission of camera-ready papers	6 Jun 2011

Webpage: www.eusipco2011.org

Organizing Committee

Honorary Chair

Miguel A. Lagunas (CTTC)

General Chair

Ana I. Pérez-Neira (UPC)

General Vice-Chair

Carles Antón-Haro (CTTC)

Technical Program Chair

Xavier Mestre (CTTC)

Technical Program Co-Chairs

Javier Hernando (UPC)

Montserrat Pardàs (UPC)

Plenary Talks

Ferran Marqués (UPC)

Yonina Eldar (Technion)

Special Sessions

Ignacio Santamaría (Universidad de Cantabria)

Mats Bengtsson (KTH)

Finances

Montserrat Nájara (UPC)

Tutorials

Daniel P. Palomar

(Hong Kong UST)

Beatrice Pesquet-Popescu (ENST)

Publicity

Stephan Pfletschinger (CTTC)

Mònica Navarro (CTTC)

Publications

Antonio Pascual (UPC)

Carles Fernández (CTTC)

Industrial Liaison & Exhibits

Angeliki Alexiou

(University of Piraeus)

Albert Sitjà (CTTC)

International Liaison

Ju Liu (Shandong University-China)

Jinhong Yuan (UNSW-Australia)

Tamas Sziranyi (SZTAKI -Hungary)

Rich Stern (CMU-USA)

Ricardo L. de Queiroz (UNB-Brazil)

